



Please read this manual carefully before operating the LED light.



LED DISPLAY FUNCTIONS

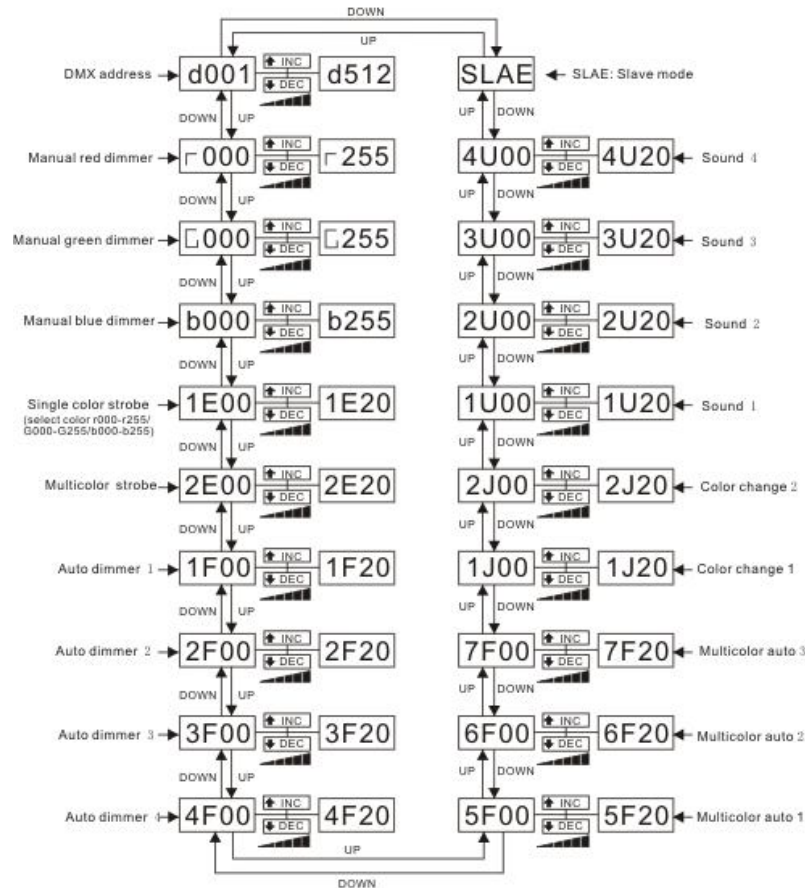

DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	manual red dimmer 0-100%
2	0-255	manual green dimmer 0-100%
3	0-255	manual blue dimmer 0-100%
4	0-255	0-27 no function 28-55 single color strobe (channel 1/2/3 control the color, channel 6 control the speed) 56-83 multicolor strobe (channel 1/2/3 on top value, channel 6 control the speed) 84-255 choose the color
5	0-255	1-90 single color dimmer 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto2 195-207 multicolor auto3 208-220 sound1 221-233 sound2 234-246 sound3 257-255 sound4 (channel 1-4 will not work in this mode. Channel 6 control the speed)
6	0-255	Control the speed

SPECIFICATIONS

- Rate Voltage: AC85V-265V Hz-60Hz (Auto-adjust)
- Rate Power: 120W
- Color: RGB
- Lamp: Super bright, 3W LED lamps
- Quantity of Lamp: 36pcs (R12G12B12 PCS)
- N.W.: 4.2kg