

BI-LD007 LED Magic Light Instruction Manual



SKILL SPECIFICATIONS:

Voltage: AC110 -240V 50Hz-60Hz

Lamp: 469 LED, 5mm, 280 red, 126 blue, 63 green

Power: 100W

Channel: 11 DMX


Flash: 1-11 times per second

Beam angle: 60 degree

DMX 512 CONTRTROL SIGNAL

The Flower Splash is controlled by international DMX512 signal, and Master/slave control. This unit will stand alone and has an audio control. For connecting refer to the diagram located below.

For example:

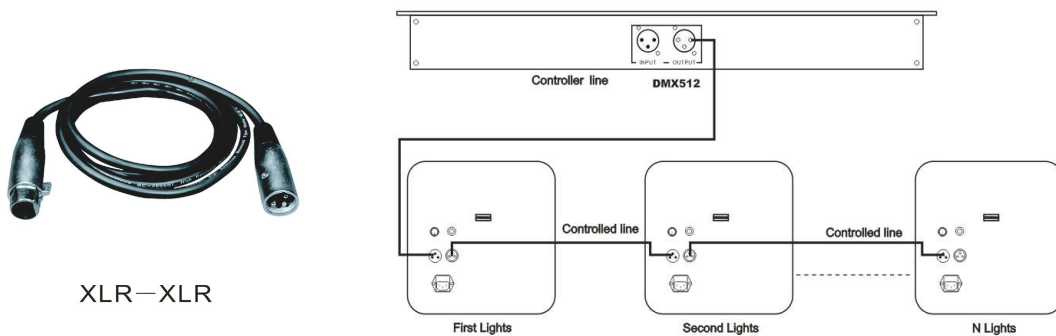

XLR-XLR

1. CHANNEL CONTROLLING INSTRUCTION

Safety Instructions

1. Avoid any direct eye contact with light when in use;
2. Always use the correct fuse;
3. Do not submerge into water;
4. Tampering with the unit will terminate warranty and is dangerous;


For trouble shooting check fuse in the back of unit and replace if damaged.

Channels	Effects	Value	Controlling Content
1	Gobo performance	0--255	Changing gobos performance
2	Speed performance	0--255	Changing gobo's speed
3	Strobe	0--4	Strobe switch off
		5--255	Strobe's speed adjustment
4	The first gobo wheel	0--35	Gobo switch off
		36--255	Gobo switch on
5	The second gobo wheel	0--35	Gobo switch close
		36--255	Gobo switch on
6	The third gobo wheel	0--35	Gobo switch close
		36--255	Gobo switch on
7	The fourth gobo wheel	0--35	Gobo switch close
		36--255	Gobo switch on
8	The fifth gobo wheel	0--35	Gobo switch close
		36--255	Gobo switch on
9	The sixth gobo wheel	0--35	Gobo switch close
		36--255	Gobo switch on
10	The seventh gobo wheel	0--35	Gobo switch close
		36--255	Gobo switch on
11	Color work synchronously sound controlling	0--49	Gobo switch close
		50--92	Red light
		93--133	Green light
		134--174	Blue light
		175--218	The three color open
		219--255	Sound controlling

2. DMX512 control ID addressing(take the controller CH 16 and CH 20 for exmple)

Light No.	16 Channel controller	20 Channel controller
The first light	1	1
The second light	1、 5	1、 3、 5
The third light	1、 6	1、 4、 6
The fourth light	1、 5、 6	1、 3、 4、 5、 6
The fifth light	1、 7	1、 5、 7
The sixth light	1、 5、 7	1、 3、 6、 7
The seventh light	1、 6、 7	1、 4、 5、 6、 7
The eighth light	1、 5、 6、 7	1、 3、 4、 8

- 1.Sound sensitivity control
- 2.Dipswitches
- 3.MIC
- 4.DMX In
- 5.DMX Out
- 6.Power

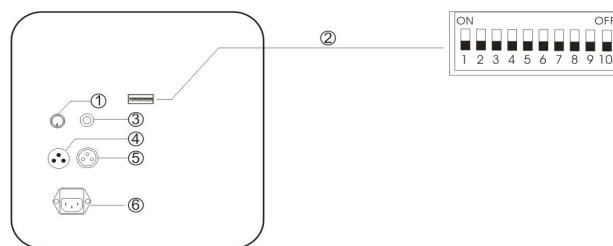

3. Stand alone performance

automatic controlled by DMX address(the

light doesn't adopt the DMX512 control, we can choose many kinds of automatic effect by DMX address, for example:

effect	DMX address: ON	DMX address: OFF
sound control		1、 2、 3、 4、 5、 6、 7、 8、 9、 10
Auto moving	1、 2、 3、 4、 5、 6、 7、 8、 9、 10	

4. Master/slave control:

This light has a Master/slave control(light must be connected to each other when adopted the Master/slave control). You can choose one of the lights for the Master light, and the rest for Slave light. Slave light will works synchronously.