



## Wireless Plug-in Doorbell with LED Alert

Order ref: 350.310UK – white, 350.311UK - black

User Manual

A stylish, wireless doorbell set, providing an innovative way to be alerted to visitors. Choose from 38 different ring tones and melodies which notifies via a compact plug-in chime with LED light alert. The chime can be plugged into any room within the wireless range, giving you flexibility to place throughout the home or office.

### Specification:

<b>Frequency</b>	433.92MHz+100KHz
<b>Range</b>	Up to 200m (clear line of sight)
<b>Volume</b>	80dB<90dB (within 0.5m)
<b>IP Rating</b>	IP44 (remote only)
<b>Power supply: receiver</b>	AC 100~240V
<b>Battery: transmitter</b>	CR2032 DC3V (supplied)
<b>Dimensions:</b>	90 x 85 x 50mm (Receiver); 80 x 45 x 18mm (Transmitter)
<b>Weight:</b>	87g (Receiver); 33g (Transmitter)


### Features:

- Stylish modern design with LED light alert
- Simple wire-free installation
- Auto-learn pairing function
- Choice of 38 ring tones and melodies
- Can also be used as an assistance button for the elderly


### In the box:

- Plug-in receiver
- Remote transmitter
- CR2032 battery (for transmitter)
- Self-adhesive pad (for transmitter)
- User manual

### Product diagram:

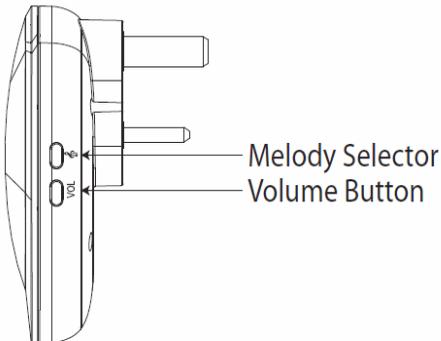


Receiver

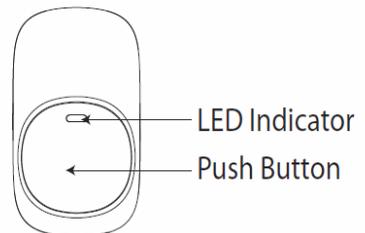

Transmitter

## Installation:

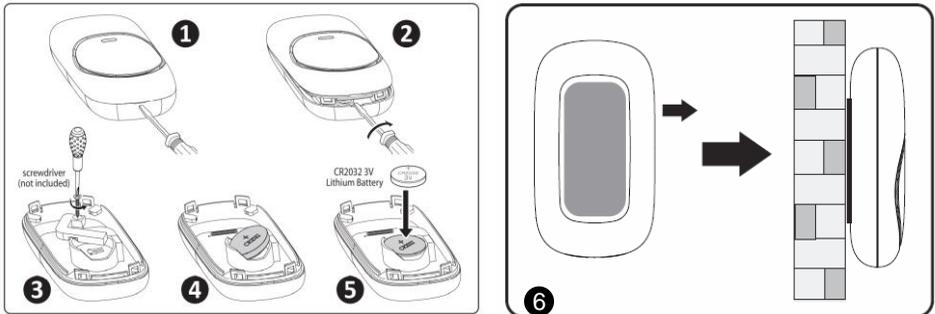

- To install the CR2032 battery (supplied) into the transmitter, first insert a small flat bladed screwdriver into the slot on the bottom of the unit, then gently twist to pop the back cover off (**Fig 1&2**). Remove the battery retaining strip using a Philips screwdriver (**Fig 3**) then insert the battery ensuring the positive side is facing upwards (**Fig 4&5**). Finally replace the retaining strip and back cover to complete the installation.
- Fix the transmitter on your door or doorframe securely using the self-adhesive pad provided (**Fig 6**), ensuring it's in an area that's not too open to the elements and as close to the receiver location as possible (max distance 200m).
- Plug the receiver into an available mains socket in your desired location and switch on. The receiver will now enter learning mode and search for a unique frequency that won't be interfered with by any other wireless devices in the surrounding area.
- Select your desired melody by pressing the melody selection button repeatedly, there are 38 different ones to choose from.
- You can also adjust the unit volume by repeatedly pressing the volume button on the side of the receiver. There are 3 levels to choose from, high, medium and low.
- Finally, press the transmitter to pair directly with the installed receiver. The transmission range is up to 200m, but this distance can be significantly reduced by obstructions such as walls, doors, floors etc. If the receiver ringtone can't be heard, ensure it's set up correctly and try again. In rare instances it may be necessary to move the receiver to a new location if it cannot be paired correctly with the transmitter.

**NOTE:** You must set your desired melody first before pairing with the transmitter. If you want to change the melody after pairing has taken place, you must switch off the power on the receiver to clear the memory and repeat from step 3 above.

If the receiver sounds at any time without anyone pressing the transmitter, there may be another wireless device close by on the same frequency causing interference. In this instance, switch off the power on the receiver to clear the memory and repeat from step 3 above.

## Warning:

- For reasons of electrical safety, this device must never be immersed in water, exposed to damp conditions or excessive force.
- Do not use this device if you find that it is damaged in any way.
- Do not attempt to repair this device or take apart under any circumstances, as this will invalidate your warranty.



This product is classed as Electrical or Electronic equipment and should not be disposed with other household or commercial waste at the end of its useful life. The goods must be disposed of according to your local council guidelines.

## Errors and omissions excepted.

Copyright© 2021 AVSL Group Ltd, Unit 2 Bridgewater Park,  
Taylor Road, Trafford Park, Manchester. M41 7JQ.

[www.avsl.com](http://www.avsl.com)

AVSL (Europe) Ltd, Unit 3D North Point House,  
North Point Bus. Park, New Mallow Road, Cork, Ireland.

350.310UK User Manual